the first first first first first for the first first

IEEE 1284 data transfer modes

lode (dard mode)	le tsing status lines)	Byte Mode (8 bit parallel transfer - using status lines)	herals) 18	19
Compatibility Mode ("Centronics" or standard mode)	Nibble Mode (4 bit parallel transfer - using status lines)	Byte Mode (8 bit parallel transfer	EPP Mode (non-printer peripherals)	ECP Mode (hi-directional used by printers scanners)




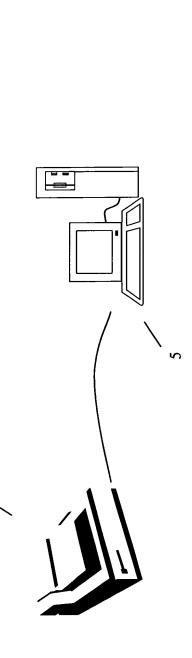


FIG. 2

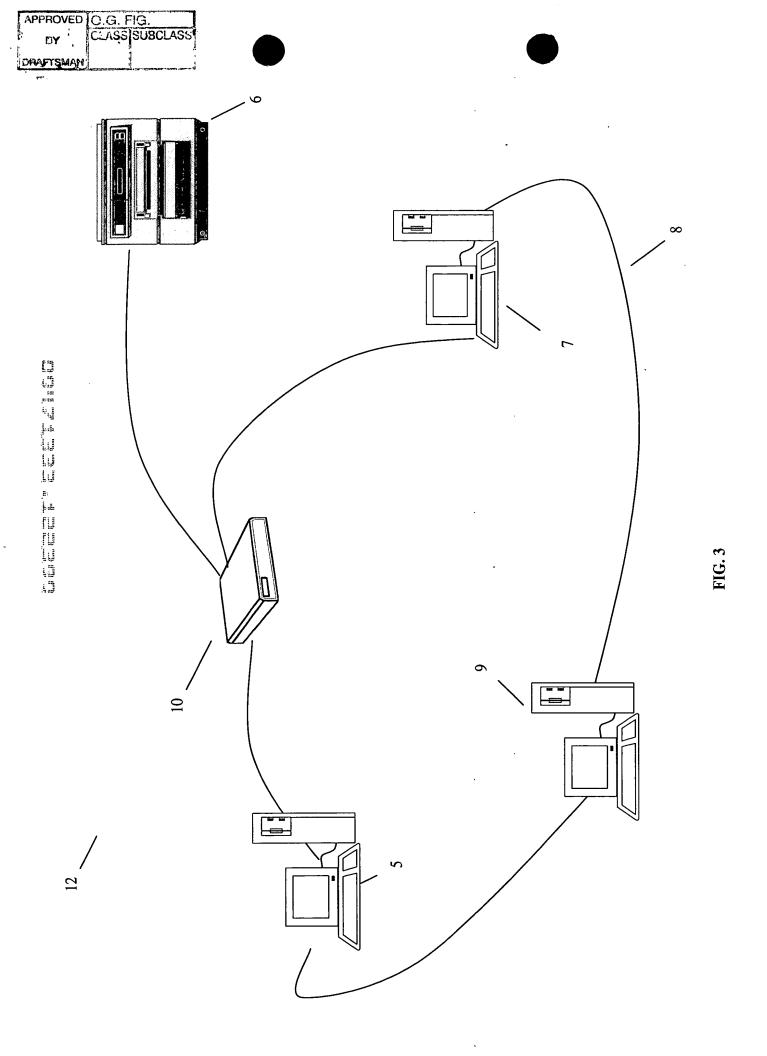

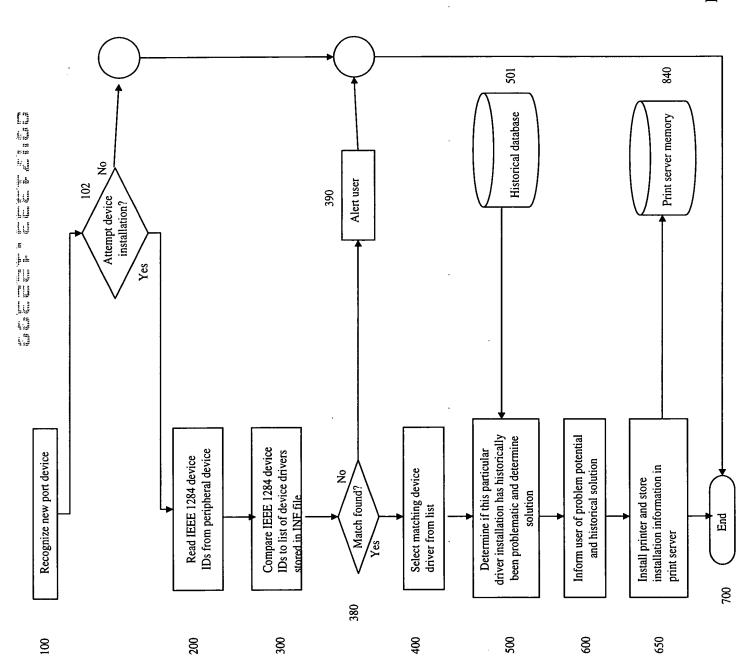

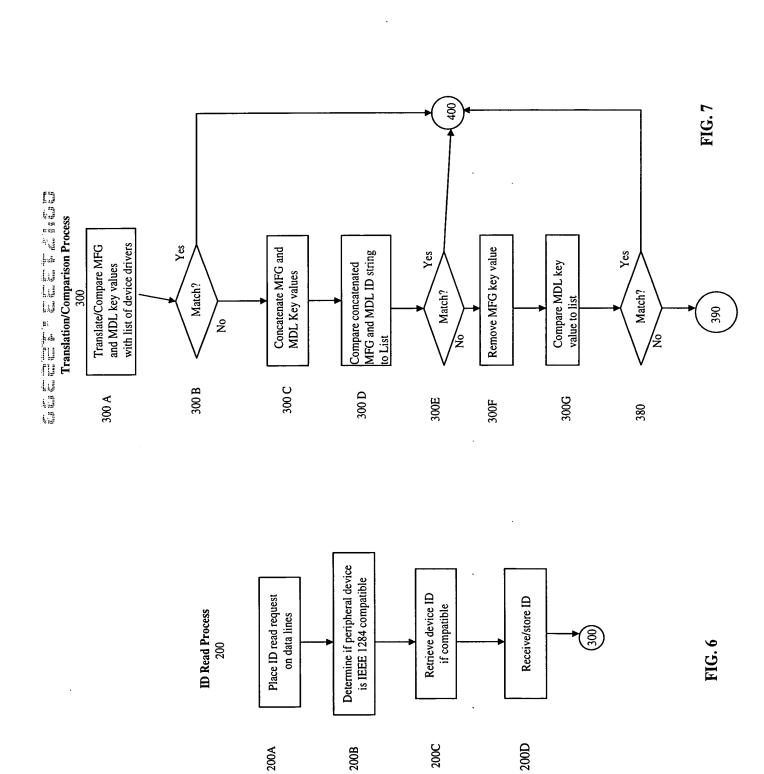

A CONTRACTOR

840

Print server memory (previous installation info)

Install printer and store installation information in print server

820

Blocks 380, 400, 500, 600, 650, and 700